



大型排水フリューム (農業土木事業協会型)

形状


■断面図

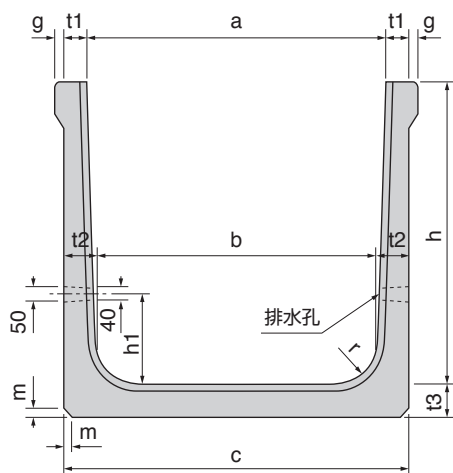


■側面図

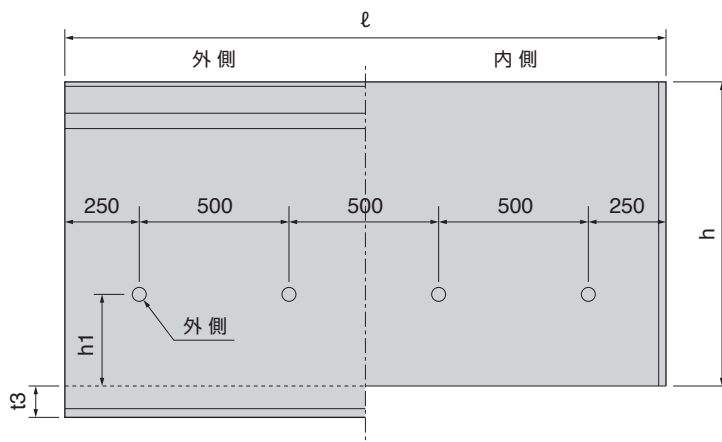

■目地詳細図

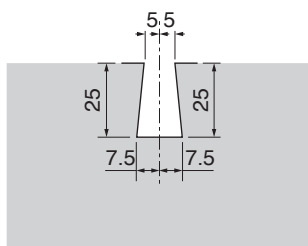

■側壁頂部詳細図



種類

側壁頂部水平線上に作用する上載荷重及び土質条件により区分されます。

種類	上載荷重(kN/m ²)	土の内部摩擦角(度)
I 種	10.0	30
II 種	15.0	25
III 種	20.0	20

土の単位体積重量…………… 18.0kN/m³
 水の単位体積重量…………… 9.8kN/m³
 水中土の単位体積重量………… 10.0kN/m³

寸法表 I 種・II 種・III 種共通

呼び名	寸法											参考重量 (kg)
	内高 h	水抜き穴 高 h1	内幅 a	内底幅 b	底版幅 C	側壁厚		底版厚 t3	ハンチ r	製品長 m	製品長 ℓ	
						上端 t1	付け根 t2					
0707	700	200	700	650	840	70	95	95	100	30	2000	970
08			800	750	940							1010
09			900	850	1040							1060
10			1000	950	1140							1100
11			1100	1050	1240							1150
12			1200	1150	1340							1190
13			1300	1250	1440							1240
14			1400	1350	1540							1280
15			1500	1450	1640							1330
0808	800	250	800	750	940	70	95	95	100	30	2000	1080
09			900	850	1040							1130
10			1000	950	1140							1170
11			1100	1050	1240							1220
12			1200	1150	1340							1260
13			1300	1250	1440							1310
14			1400	1350	1540							1350
15			1500	1450	1640							1400
16			1600	1550	1740							1450
17	1700	1650	1840	1490								
0909	900	300	900	850	1050	75	100	100	100	30	2000	1290
10			1000	950	1150							1330
11			1100	1050	1250							1380
12			1200	1150	1350							1420
13			1300	1250	1450							1470
14			1400	1350	1550							1510
15			1500	1450	1650							1560
16			1600	1550	1750							1600
1008	1000	300	800	730	950	75	110	110	150	30	2000	1430
09			900	830	1050							1480
10			1000	930	1150							1530
11			1100	1030	1250							1590
12			1200	1130	1350							1640
13			1300	1230	1450							1700
14			1400	1330	1550							1750
15			1500	1430	1650							1800
16			1600	1530	1750							1850
17			1700	1630	1850							1900
18			1800	1730	1950							1960
19			1900	1830	2050							2010
20	2000	1930	2150	2060								
1111	1100	350	1100	1030	1260	80	115	115	150	30	2000	1770
12			1200	1130	1360							1820
13			1300	1230	1460							1880
14			1400	1330	1560							1930
15			1500	1430	1660							1980
16			1600	1530	1760							2040
17			1700	1630	1860							2090
18			1800	1730	1960							2140
19			1900	1830	2060							2200
20			2000	1930	2160							2250
21			2100	2030	2260							2300

大型排水フリューム(農業土木事業協会型)

寸法表 I 種・II 種・III 種共通

呼び名	寸法											参考重量 (kg)
	内高 h	水抜き穴 高 h1	内幅 a	内底幅 b	底版幅 C	側壁厚		底版厚 t3	ハンチ r	製品長 m	製品長 ℓ	
						上端 t1	付け根 t2					
1212	1200	400	1200	1120	1370	85	125	125	150	30	2000	2060
13			1300	1220	1470							2120
14			1400	1320	1570							2180
15			1500	1420	1670							2240
16			1600	1520	1770							2300
17			1700	1620	1870							2360
18			1800	1720	1970							2420
19			1900	1820	2070							2480
20			2000	1920	2170							2540
21			2100	2020	2270							2590
1309	1300	400	900	810	1090	95	140	140	150	30	2000	2230
10			1000	910	1190							2300
11			1100	1010	1290							2360
12			1200	1110	1390							2430
13			1300	1210	1490							2500
14			1400	1310	1590							2560
15			1500	1410	1690							2630
16			1600	1510	1790							2690
17			1700	1610	1890							2760
18			1800	1710	1990							2820
19			1900	1810	2090							2890
20			2000	1910	2190							2950
1412	1400	450	1200	1110	1410	105	150	150	150	30	2000	2740
13			1300	1210	1510							2820
14			1400	1310	1610							2890
15			1500	1410	1710							2960
16			1600	1510	1810							3030
17			1700	1610	1910							3100
18			1800	1710	2010							3120
19			1900	1810	2110							3240
20			2000	1910	2210							3310
1513	1500	500	1300	1200	1520	110	160	160	250	30	2000	3190
14			1400	1300	1620							3270
15			1500	1400	1720							3350
16			1600	1500	1820							3430
17			1700	1600	1920							3510
18			1800	1700	2020							3580
19			1900	1800	2120							3660
20			2000	1900	2220							3730
1616	1600	500	1600	1490	1830	115	170	170	250	30	2000	3750
17			1700	1590	1930							3830
18			1800	1690	2030							3910
19			1900	1790	2130							3990
20			2000	1890	2230							4070